



encit 2020



18th Brazilian Congress of Thermal Sciences and Engineering
November 16-20, 2020 (Online)

ENC-2020-0579

FLAT PLATE PULSATING HEAT PIPES WITH DIFFERENT CHANNEL GEOMETRIES FOR HIGH HEAT FLUX APPLICATIONS

Larissa Krambeck

Kelvin Guessi Domiciano

Luis Alonso Betancur Arboleda

Márcia Barbosa Henriques Mantelli

Heat Pipe Laboratory, Department of Mechanical Engineering, Federal University of Santa Catarina, Florianópolis, Brazil
larissa.krambeck@labtucal.ufsc.br / kelvin.guessi@labtucal.ufsc.br / luisbetancur@labtucal.ufsc.br / marcia@labtucal.ufsc.br

Abstract. *The thermal performance of flat plate pulsating heat pipes with different channel geometries was performed in this experimental work. The tests were accomplished with two channel profiles, round and grooved. One of the channel geometries, located on the evaporator, can be considered novel, consisting of a round channel with two lateral grooves. Diffusion bonding technology was used to manufacture the PHPs made of two copper flat plates. Distilled water was used as the working fluid with a filling ratio of 50% (17.9 ml) of the total volume. The pulsating heat pipes were tested at one position (vertical) under heat loads from 20 up to 2000 W. The experimental results showed that both flat plate pulsating heat pipes operates successfully for high heat fluxes. The lateral grooves reduced the thermal resistance, being principally efficient in lower loads. Besides that, the novel channel considerably anticipated the operation startup. Therefore, a much better performance was obtained by the grooved channel PHP, which was constructed from a simple, low cost modification of the fabrication process.*

Keywords: *pulsating heat pipe, thermal performance, high heat flux, grooves.*

1. INTRODUCTION

The continue upgrade of high-performance electronic components increases the heat generation during their operation. To guarantee a minimum lifespan degradation of these devices, new heat removal technologies are required. From that, heat exchangers with higher performance must be explored.

A new technology, the pulsating heat pipe (PHP), first patented in the early 1990s by Akachi (1990) is among those that can fulfill these industry requirements. It consists of an evacuated small diameter tube with a working fluid that operates in a closed two-phase chaotic cycle. Besides being a high efficiency heat exchanger device, it has promising advantages such as flexibility, low costs, and reliability.

A PHP operates in a closed two-phase chaotic and pulsating cycle, due to the particular internal arrangement of the channel, associated with the continuous phase change phenomena and the fluid confinement. A sketch of the operation principle is shown in Fig. 1.

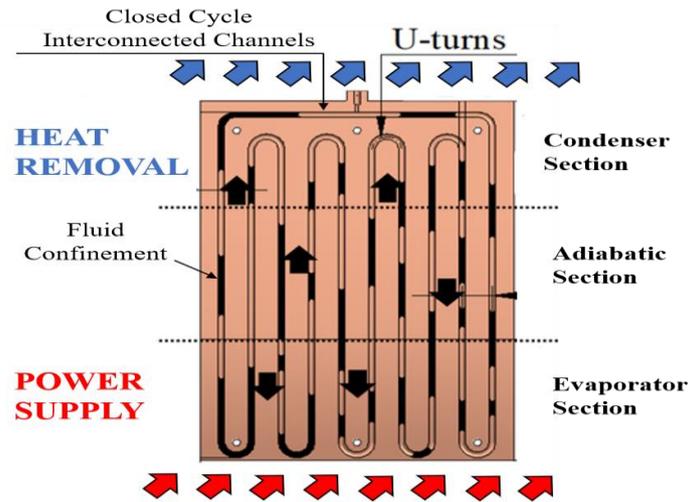


Figure 1. Sketch of a flat plate PHP operation principle.

To improve the thermal efficiency, several researchers have studied the effect of grooves on thermal resistance of PHP. Khan and Farjat (2011) compiled information of literature works concerning the cross section geometry of PHPs, concluding around 50% of the works deal with square channels, followed by 30% of studies about circular channels, and the other 20% are regarding trapezoidal, triangular and other geometries. Khandekar et al. (2003) accomplished that circular channels presents higher thermal resistance when compared to rectangular ones. The main reason for this behavior is the capillarity provided by channel edges. The same conclusion was found by Facin et al. (2018) and Betancur-Arboleta et al. (2020). However, the mechanical deformation of the cross-section of pulsating heat pipes with rectangular geometry are larger than the circular ones, due to the fabrication process and usual operational working fluid pressure, lower than the environment.

In this context, some researchers propose the use of grooves to improve the thermal performance of PHPs. Cai et al. (2006) verified that the microstructural groove reduces the evaporator temperature fluctuations, allowing high effective thermal conductivity. Channels with different geometries are also studied by Qu et al. (2017) and Kim and Kim (2018).

The purpose of this study is to evaluate the thermal performance of a flat plate PHPs with a new evaporator channel geometry, composed by round cross section channel and lateral grooves, for high heat flux applications. An experimental analysis of this PHP was performed in vertical position and under heat loads from 20 up to 2000W. The results were compared with round cross section PHPs.

2. METHODOLOGY

Two flat plate PHPs, made of copper plate with a total length of 208 mm and a width of 150 mm, are shown in Figure 2. Diffusion bonding technology was used to manufacture the PHPs. More information about this process is presented in Betancur-Arboleta et al. (2020). Distilled water was used as the working fluid with a filling ratio (FR – the volume of liquid over the total internal volume of the channels) of 50%, which corresponds to 17.90 ml. Preliminary tests showed this FR has the best thermal performance for this configuration of PHP.

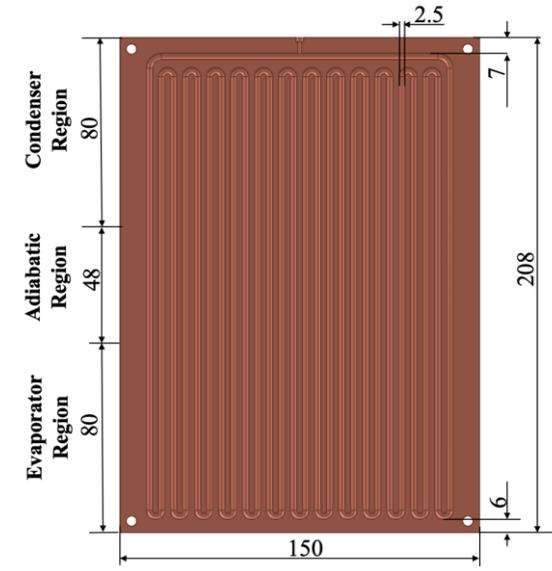


Figure 2. Schematic design of the PHPs.

2.1 Channel geometry of the PHPs

The PHPs were fabricated by two superposed plates with 26 parallel semicircular channels (13 U-turns) with a diameter of 2.5mm. Two different types of cross-section geometries in the evaporator section were selected for testing. Basically, the cross-section geometry of the tested PHPs is round (Fig. 3a), but, for one of them, two lateral grooves are provided (Fig. 3b) at the interface between the plates, at the evaporator zone. This last geometry is new. The idea is to create edges that work as capillary media that is able to keep working fluid along the whole evaporator. The fabrication process of this new configuration is very simple: chamfers of 20° angles are drilled at the corners of the semi-circular grooves in both plates, before the diffusion bonding process takes place, resulting in grooves of 40° of angle and an opening (mouth) of 0.36 mm of dimension. The micro-scale images of the circular and grooved channels obtained by Secondary Electron (SE) in Scanning Electron Microscope (Jeol™ JSM-6390LV) are shown in Fig. 3c and Fig. 3d, respectively.

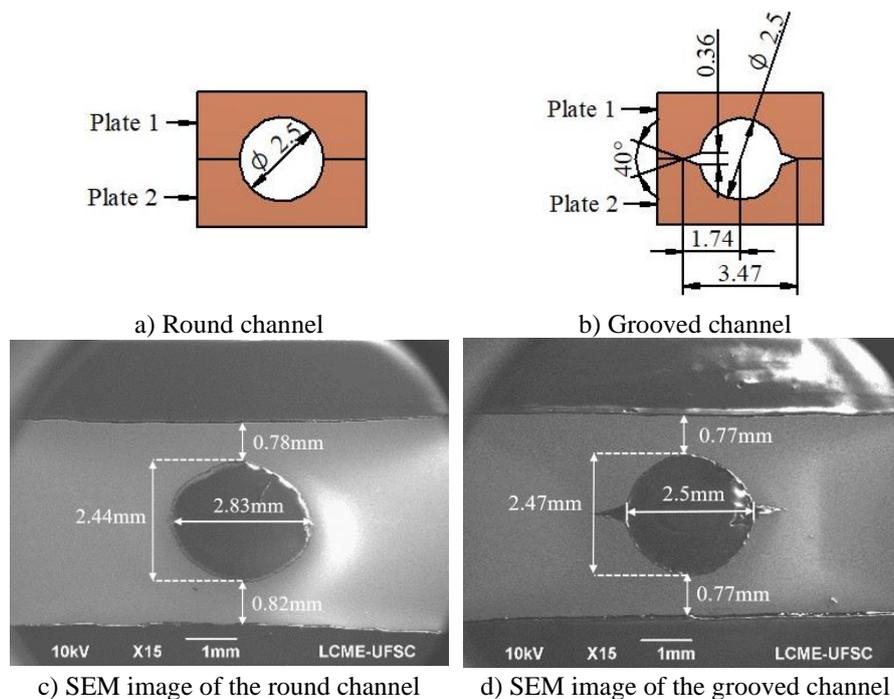


Figure 3. Sketch and SEM images of the channel's profiles in the evaporator section. a) Round channel b) Grooved channel c) SEM image of the round channel d) SEM image of the grooved channel (BETANCUR-ARBOLEDA et al., 2020).

2.2 Experimental Apparatus

The experimental apparatus used for the experimental tests, shown in Fig. 4, is composed of a programmable power source (*TDK-Lambda*TM GEN300-17), data acquisition system (*DAQ-NI*TM SCXI-1000), a *Dell*TM laptop, a thermal bath (*Lauda Proline*TM RP1845) and T-type thermocouples (*Omega Engineering*TM).

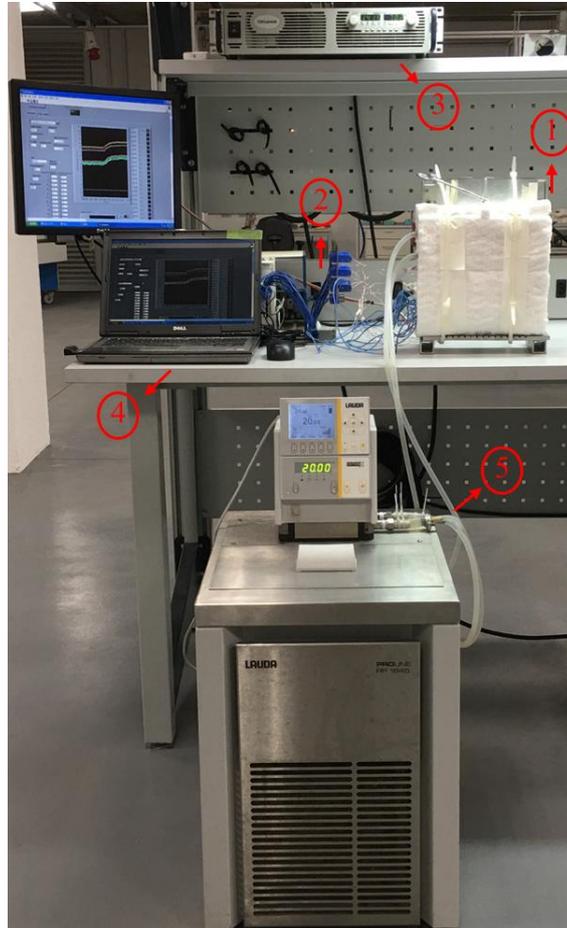


Figure 4. Experimental apparatus. 1) PHP; 2) Data acquisition; 3) Power source; 4) Computer; 5) Thermal bath.

The experimental apparatus should be able to guarantee that the electrical resistance supplies the heat to the evaporator, which is removed by the heat sink on the condenser. The PHPs present an evaporator region of 80 mm in length, an adiabatic region of 48 mm and a condensation region of 80 mm. In the evaporator, a programmable power source TDK-Lambda GEN300-17 supplies energy to eight cartridge electrical resistances (10 mm of diameter and 100 mm of length) embedded on copper block (140 mm x 20 mm). Each electrical resistance can provide up to 320W. The total evaporator contact area is 22,400 mm². The condenser is composed of an aluminum block (140 mm x 80 mm) with a heat exchange area of 11,200 mm². The condenser block consists of two parallel channels for water flow, which temperature is controlled by thermal bath Lauda Proline RP1845 of 20 l/min. Thermal grease *Omegatherm*TM 201 was used to reduce the contact resistance. To prevent losses to the external ambient, the entire test section is isolated with ceramic fiber blanket with a thickness of 20mm. An adiabatic section is provided between the evaporator and the condenser. A scheme of the PHP sections is presented in Fig. 5.

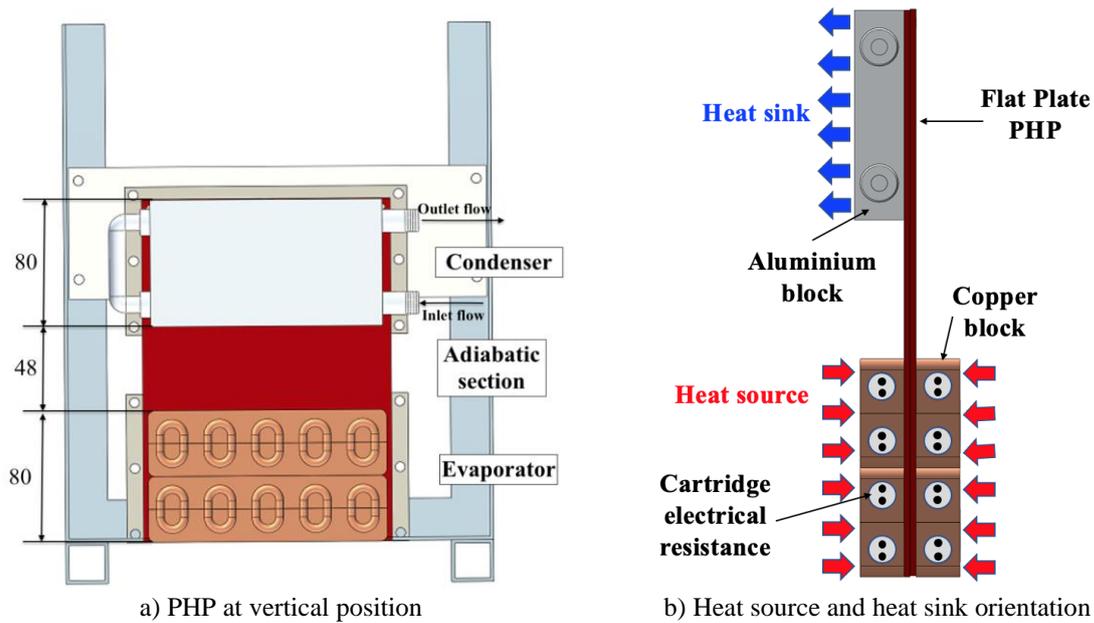


Figure 5. Scheme of the experimental setup.

For the evaluation of the thermal performance of the heat pipes, fourteen T-type thermocouples *Omega Engineering*TM, connected to *DAQ-NI*TM SCXI-1000 data acquisition system, were used. The maximum error of the thermocouples is $\pm 0.3^{\circ}\text{C}$. They were fixed on the outer surface by a thermosensitive adhesive strip *Kapton*TM. Five thermocouples were installed in the evaporator ($T_{\text{evap},1}$ to $T_{\text{evap},5}$), three in the adiabatic section ($T_{\text{adiab},1}$ to $T_{\text{adiab},3}$) and five in the condenser ($T_{\text{cond},1}$ to $T_{\text{cond},5}$), as presented in Fig. 6. In addition, a thermocouple measures the ambient temperature.

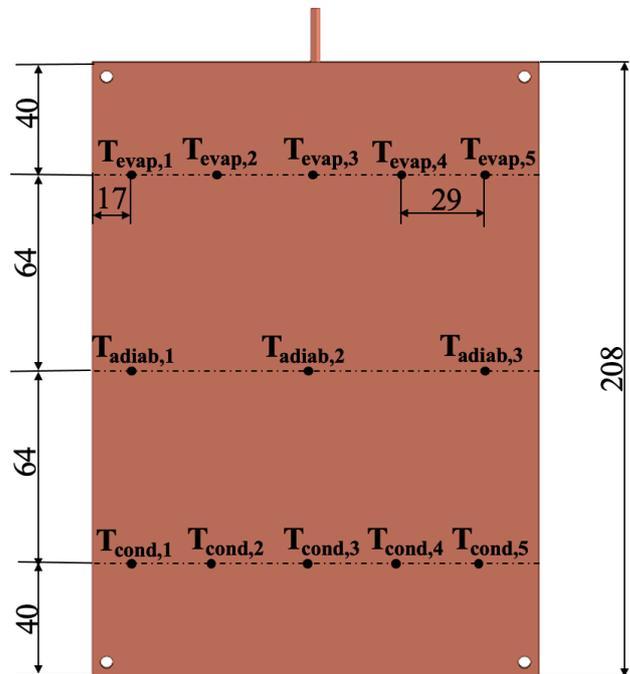


Figure 6. Thermocouples distribution of PHPs.

For all the experiments, water flow was remained at 20°C in the condenser. The heat loads varied from 20 W up to 2000W. Each heat load input level was kept for 900, to guarantee steady-state operation. The empty PHP presented a deviation lower than $0.3^{\circ}\text{C}/\text{min}$. Data were acquired every at each second rate (one data per second) and recorded in a laptop with the *Labview* software.

2.3 Data Reduction

The evaluation of the thermal performance of heat pipes can be estimated by the thermal resistance, which is defined as the ratio between the temperature difference between the evaporator and condenser regions and the dissipated power. The evaporator temperature \bar{T}_{evap} is the average temperature of the thermocouples located in the evaporator zone. The condenser temperature \bar{T}_{cond} is the average temperature of the thermocouples at the condenser. The adiabatic temperature \bar{T}_{adiab} is the average temperature of the thermocouples in the adiabatic section. Thus, the overall thermal resistance can be determined as:

$$R_t = \frac{\bar{T}_e - \bar{T}_c}{q} \quad (1)$$

The experimental uncertainties are calculated using the error propagation technique (see HOLMAN, 2011). They are associated with the T-type thermocouples, the data logger, and the power supply. The average experimental temperature uncertainty was estimated at approximately $\pm 0.07^\circ\text{C}$. The voltage and current uncertainties provided by the manufacturer are 30 mV and 8.5 mA, respectively. Therefore, the uncertainty of the thermal resistance was found to be 26% at 20W, decreasing to less than 6% at 2000W. The uncertainties are shown in the experimental results section.


A relative difference of the thermal resistance gives the improvement of the thermal performance caused by the presence of grooves in the evaporator. This parameter can be calculated with the equation:

$$RF\% = \frac{R_{t,grooved} - R_{t,round}}{R_{t,round}} \times 100 \quad (2)$$


3. EXPERIMENTAL RESULTS

The transient behavior of the PHPs for power levels varying from 20 up to 2000W at vertical position are shown in the Fig. 7. Both PHPs work successfully and, as expected, as the dissipated power increases, the temperatures also rise. The round channel PHP, Fig. 7a, shows that at 80W vapor starts to leave the medium the evaporator zone and reaches the adiabatic section of one of the channels ($T_{adiab.2}$). On the other hand, for the grooved channel, Fig. 7b, vapor starts to achieve the adiabatic region at just 40W, as same thermocouples show. Besides that, the temperature of the entire adiabatic zone reaches the evaporator temperature faster in this channel profile.

The main differences in the thermal performance of the grooved PHP is related to the startup and to the uniformity of temperatures. The devices show a different head load level for the start-up, which can be observed when the vapor achieves the condenser, therefore closing the thermodynamic cycle. The round channel PHP starts at 80W with an evaporator temperature of approximately 50°C , while the grooved one starts at 60W with an evaporator at nearly 45°C , approximately. The grooved channel presented a greater temperature uniformity, i.e., the temperature range is smaller than the round one. As an example, for the round channel profile at 2000W, the temperatures variations at the evaporator is around 5°C , at the adiabatic section of 11°C , and at the condenser of 17°C . However, for the grooved one, the evaporator, adiabatic section and condenser temperatures variations are about 3°C , 2°C , and 8°C , respectively.

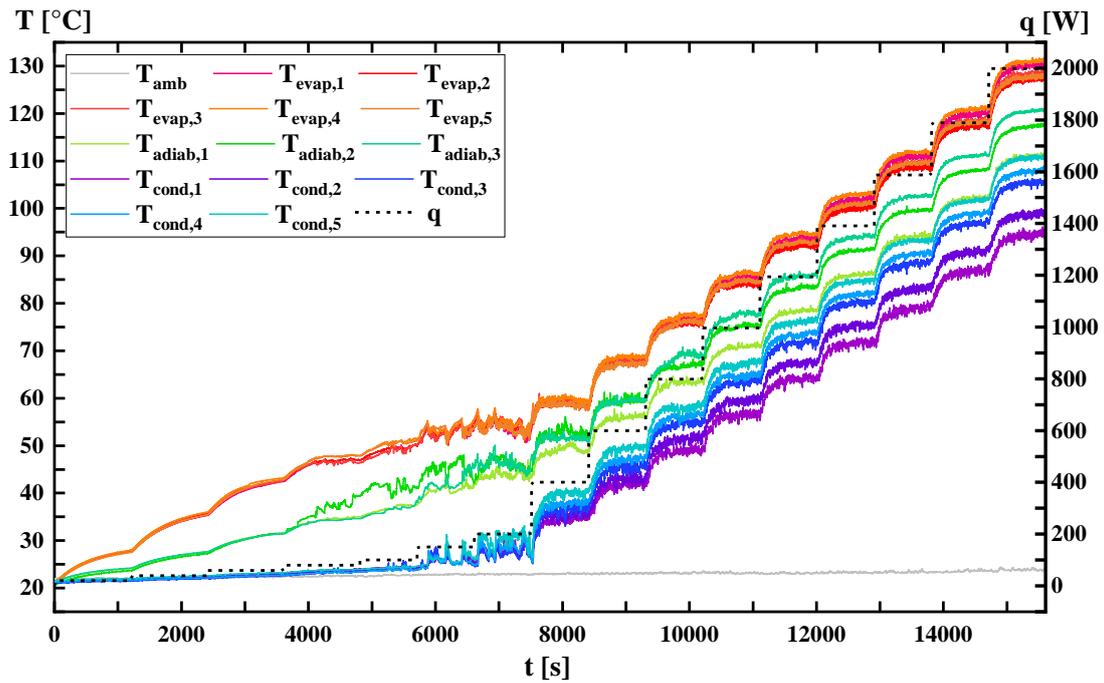

a) round channel PHP at vertical position

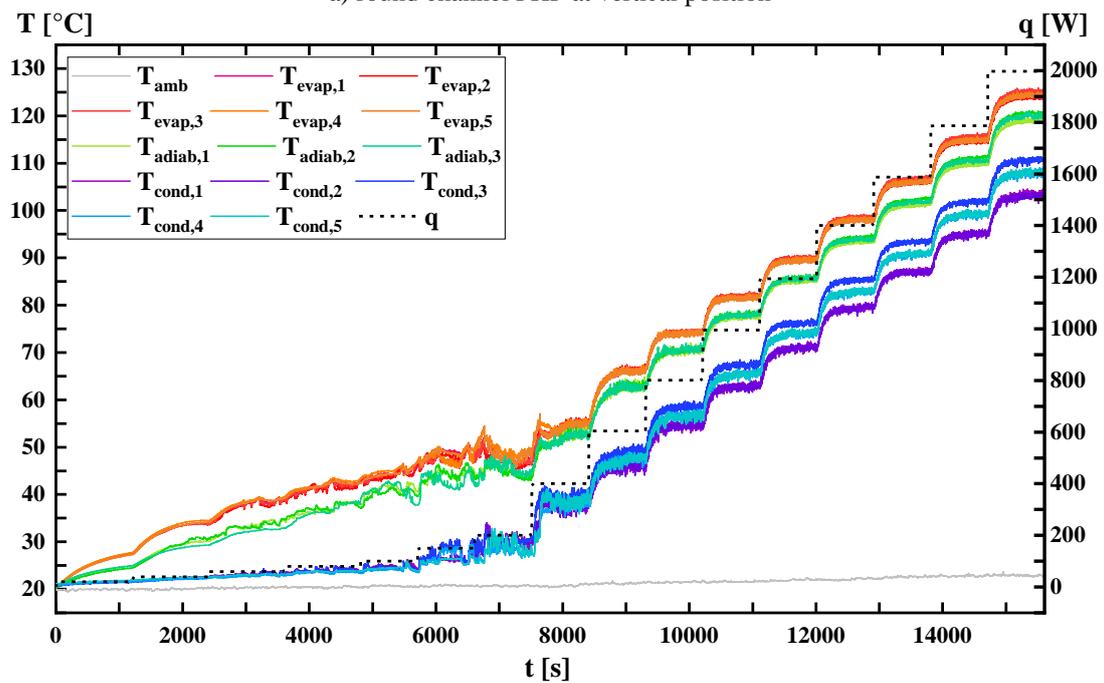

b) grooved channel PHP at vertical position

Figure 7. Transient behavior of PHPs at power levels from 20 up to 2000W at vertical position and FR of 50% .

Calculating the average temperature of the PHP's sections, it is clear that the grooved PHP has lower temperature at the evaporator zone, of almost 5°C, and that the average temperatures of the three regions are closer. Although 5°C can be considered a small difference, in electronics applications this reduction can be crucial for the life cycle of the components (V. LAKSHMINARAYANAN; N. SRIRAAM, 2014). At the adiabatic and condenser zones, the temperature is higher at the same variation. This difference is a consequence of the better operation of the grooved channel PHP. The average temperature of all sections of the PHP are shown in the Fig. 8.

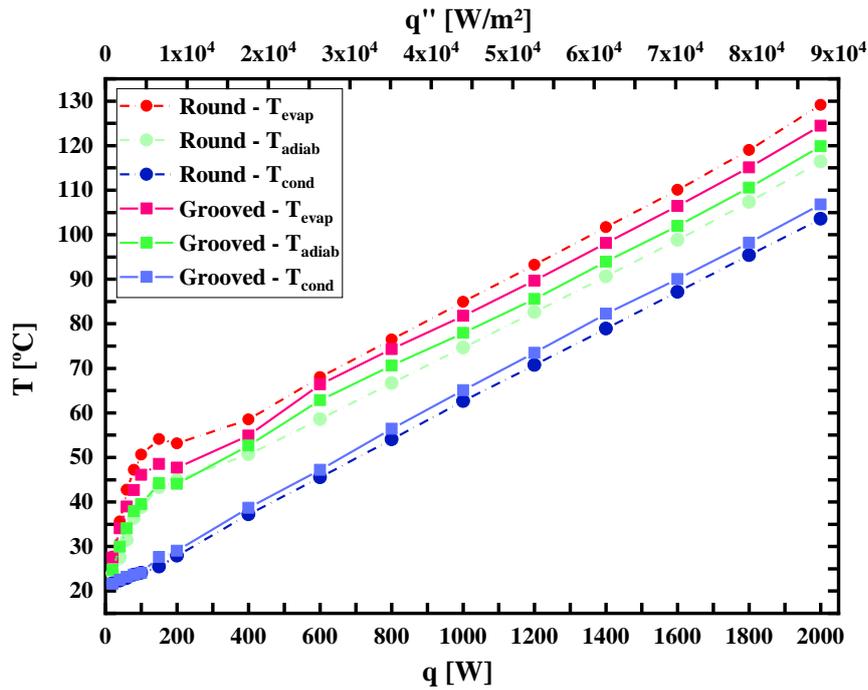


Figure 8. Average temperature of the evaporator zone (T_{evap}), adiabatic section (T_{adiab}) and condenser zone (T_{cond}) for different heat loads.

The thermal resistance is a very interesting parameter that can show the capacity of the tube in transporting more heat using two-phase heat exchange mechanism, being defined by Eq. (1). Figure 9a presents the thermal resistance of both PHPs. According to this figure, the thermal resistance of the grooved PHP is smaller than the round one, for every heat load, which means that the grooves improve the device heat transfer capability. Also, the startup can be observed in the

Figure 9a by the sudden decrease of the thermal resistance. Figure 9b presents the relative difference (percentage) of the improvement (RF[%]) in thermal resistance using lateral grooves (see Eq. (2)), which is clearly for all the dissipated power applied. The thermal resistance of the round PHP with grooves decreases at least 10%, when compared to the round PHP, for powers between 40W and 2000W.

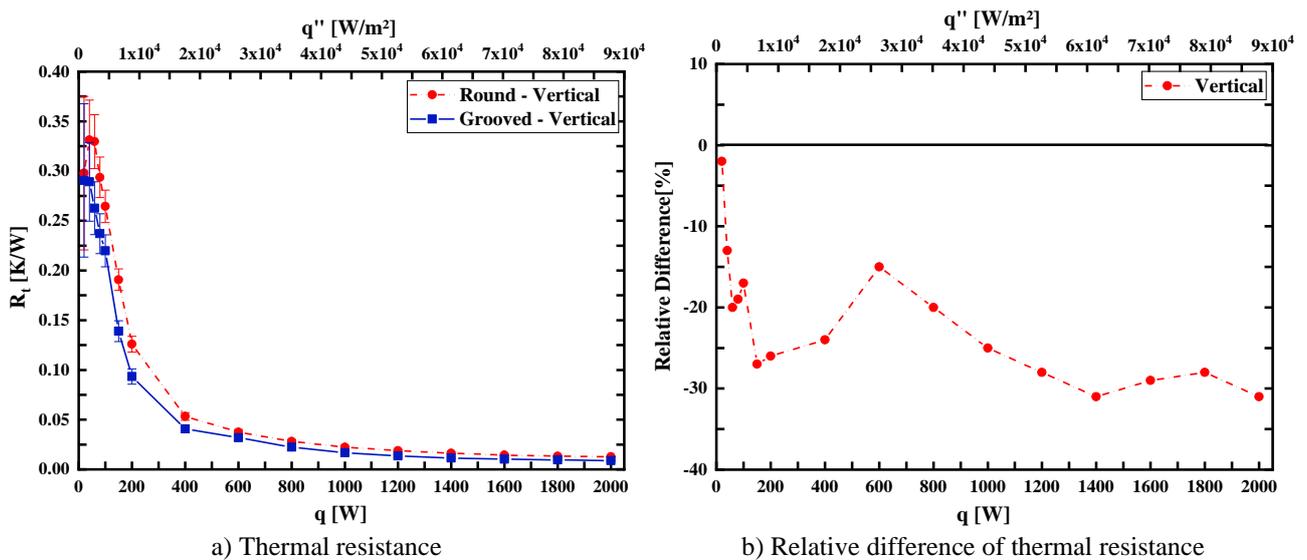


Figure 9. Thermal resistance and relative difference (percentage) of improvement in the thermal resistance of the PHPs at vertical position with FR 50%.

After the PHP activation, the slope of the curves for the grooved and round channel devices follows a similar trend. Even though, the grooved PHP always showed a better thermal performance. Close to 600W, one can conclude that both

of them has the same thermal resistance, which is in agreement with literature remarks (KIM; KIM, 2018), which highlights that grooves have higher influence at lower powers.

4. CONCLUSIONS

In this paper, two flat plate pulsating heat pipes with 26 channels were experimental evaluated for high flux applications in the vertical position. The heat loads varied from 20 up to 2000 W. One of the PHPs has grooves in the evaporator regions, obtained by a simple to machine lateral chamfers in the sharp corners of the grooved plates. The conclusions are:

- Both PHPs work successfully and as expected, as the dissipated power increases, the temperatures also rise, and the thermal resistances reduce.
- The main differences in the thermal performance between the grooved PHP and the round one is related to the startup and uniformity of temperatures.
- The round channel has a later startup when compared to the grooved profile.
- The grooves reduced the temperature variation within each section.
- After the PHP activation, the slope of the curves for the grooved and round channel devices follows a similar trend.
- The grooved PHP always showed a better thermal performance with a lower thermal resistance.

Concluding, one can say that a simple modification in the channel geometry results in a considerable thermal enhancement of the flat plate pulsating heat pipe operating in vertical position. This means that grooved PHPs are convenient for lower heat loads, as they start-up at lower power levels and as, in high fluxes, both devices demonstrate similar efficiencies. Further studies are necessary to explore the groove effect at different filling ratios and the devices operating at positions against gravity.

5. ACKNOWLEDGEMENTS

Acknowledgments are provided to the CNPq (Conselho Nacional de Desenvolvimento Científico e Tecnológico) and the UFSC (Universidade Federal de Santa Catarina) for their support.

6. REFERENCES

AKACHI, H. **Structure of a Heat Pipe**, 1990.

BETANCUR-ARBOLEDA, L. et al. Diffusion-bonded pulsating heat pipes: fabrication study and new channel proposal. **Journal of the Brazilian Society of Mechanical Sciences and Engineering**, v. 42, n. 9, 2020.

CAI, Q.; CHEN, C. L.; ASFIA, J. F. Heat transfer enhancement of planar pulsating heat pipe device. **American Society of Mechanical Engineers, Heat Transfer Division, (Publication) HTD**, p. 1–6, 2006.

FACIN, A. et al. **Influence of channel geometry on diffusion bonded flat plate pulsating heat pipes**. 19th International Heat Pipe Conference and 13th International Heat Pipe Symposium. **Anais...**Pisa, Italy, June 10-14: 2018

HOLMAN, J. P. **Experimental methods for engineers**. 8th. ed. New York, USA: [s.n.].

KHAN, M. G.; FARJAT, A. A review on microchannel heat exchangers and potential applications. **International Journal of Energy Research**, v. 35, n. July 2010, p. 553–582, 2011.

KHANDEKAR, S. et al. Closed loop pulsating heat pipes - Part B: Visualization and semi-empirical modeling. **Applied Thermal Engineering**, v. 23, n. 16, p. 2021–2033, 2003.

KIM, W.; KIM, S. J. Effect of reentrant cavities on the thermal performance of a pulsating heat pipe. **Applied Thermal Engineering**, v. 133, n. December 2017, p. 61–69, 2018.

QU, J. et al. Thermal performance comparison of oscillating heat pipes with and without helical micro-grooves. **Heat and Mass Transfer/Waerme- und Stoffuebertragung**, v. 53, n. 11, p. 3383–3390, 2017.

V. LAKSHMINARAYANAN ; N. SRIRAAM. **The effect of temperature on the reliability of electronic components**. IEEE International Conference on Electronics, Computing and Communication Technologies (CONECCT). **Anais...**Bangalore: 2014

7. RESPONSIBILITY NOTICE

The authors are the only responsible for the printed material included in this paper.