

Time-dependent analysis of critical buckling load using optimization technique

Kaique M. M. Magalhães ¹, Alexandre M. Wahrhaftig ², Marcelo A. da Silva ³, Reyolando M. L. R. F. Brasil ⁴

¹ Graduate Program in Civil Engineering, Department of Structure and Geotechnic Graduates, University of São Paulo, Av. Prof. Almeida Prado, trav.2, 83, Cidade Universitária, 05508-900, São Paulo, Brazil, kaiquemagalhaes@usp.br

² Department of Construction and Structures, Federal University of Bahia, Rua Aristides Novis, 02, 5^o andar, Federação, 40210-630, Salvador, Brazil, alixa@ufba.br

^{3,4} Center for Engineering, Modeling and Applied Social Sciences, Federal University of ABC, Rua Arcturus, 03, Jardim Antares, São Bernardo do Campo, 09606-070, São Paulo, Brazil, ³marcelo.araujo@ufabc.edu.br;

⁴reyolando.brasil@ufabc.edu.br

Abstract: An analytical and numerical analysis was developed to determine the time-dependent critical buckling load of a slender reinforced concrete column. The analytical solution was based on the Rayleigh method, where different trial functions were fitted to the numerical model, developed using the Finite Element Method (FEM), applying optimization techniques. In the analysis, the non-linearity due to the slenderness of the system together with the rheological property of the concrete considered through the Eurocode 2 was considered in the calculation. To compare results, two trial functions of the Rayleigh method were used, a trigonometric and a quadratic. In this context, the quadratic equation was used to apply the optimization technique with its coefficients adjusted to produce results as close as possible to that from FEM.

Keywords: Critical buckling load, optimization, trial functions

INTRODUCTION

The structural designs of slender reinforced concrete elements are reason for constant investigation in academia and industry, since such elements present very peculiar behaviors, under compression, in relation to others structural systems usually adopted in reinforced concrete elements. The slenderness of a structure is measured by the slenderness ration, calculated by the ratio of its buckling length and the gyration radius, which involves the cross-section, therefore, the greater this coefficient, the greater the slenderness of the element and, consequently, more careful analyzes should be done to determine the equilibrium condition.

Slender columns, which according to the definition of Uzny (2011), are continuous structural elements subjected to different compressive forces, have a wide variety of applications in the industry, such as mobile phone towers, poles, wind energy turbines, etc. Such elements are dimensioned or assessed considering mainly stability, i.e., the column may be subject to collapse without having reached its ultimate compressive stress. In such elements, the main failure mechanism, used in their design, is instability rather than ultimate stress failure.

Elastic buckling of columns was first investigated by Euler (1774), but in his first postulations he was not able to incorporate the influence of the columns self-weight, which in some particular cases can lead to significant errors to the problem (Wahrhaftig et al., 2020). In order to improve Euler's formulation, Timoshenko (1961) managed to solve the problem adding to the analytical formulations the consideration of the structural self-weight, making the formulation more realistic.

Currently, the use of software for structural analysis is increasingly frequent, due to the ease of computational methods in solving complex problems, such as structures with various degrees of freedom, complex geometries, and high slenderness. However, it is important to emphasize that solutions by numerical methods are based on analytical procedures, so both methods are still important in the solution process.

Regarding the use of computer in engineering, Courant (1943) was the first researcher to create a numerical model for structural analysis using the principle of stationary potential energy, assuming a linear distribution of functions, whose approximation extends to the Rayleigh-Ritz (RR) model. Rayleigh (1877) studied vibration problems and presented his postulates in his book called "Theory of Sound". The main advantage of the Rayleigh method is that a global approximation for spatial and temporal discretization is obtained, adopting a trial function that represents the deformed behavior of the element.

The trial functions must satisfy the boundary conditions of the structural element, in addition to being differentiable throughout its domain. It is important to note that, for different trial functions, different results will be obtained. In this sense, this paper presents a mathematical analysis based on dynamics and applying the Rayleigh method, and numerical with modeling by the Finite Element Method (FEM). Optimization techniques were applied to obtain the parameters of the trial function seeking to minimize the error of mathematical modeling with FEM.

ANALYTICAL PROCEDURE

The analytical procedure developed in this article was based on the Rayleigh method, applying the principle of virtual work (PVW). The mathematical model, shown in Fig. 1, represents a column fixed at the bottom and free at the top end, where the PVW was described in terms of coordinates defined at the free end of the column, considering an undamped free vibration:

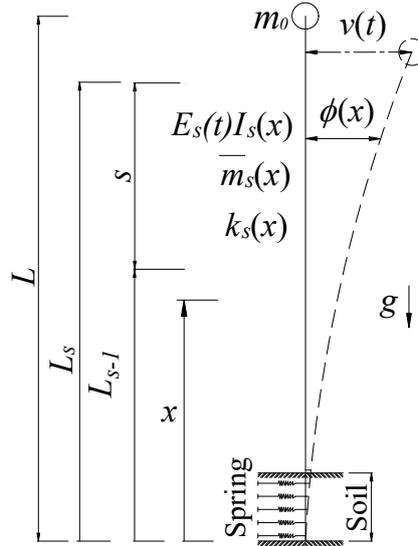


Figure 1 – Mathematical model

This model represents a column under axial compressive forces originated by its self-weight and a concentrated mass at the free end. That column may have constant and variable properties along its length. These properties include geometry ($I_s(x)$), elasticity or viscoelasticity ($E_s(t)$) and density ($\bar{m}_s(x)$), where the index s represents the considered segment; x is the geometric independent variable with origin at the base of the column. Spring stiffness $k_{so}(x)$ represents the soil-structure interaction; $\phi(x)$ is the displacement approximation function (trial function); t indicates time; L is the total length of the structure; L_s and L_{s-1} are the height at the upper and lower limits of a given segment, whose length is obtained by the difference between these two positions, and $v(t)$ is the generalized time-dependent coordinate localized at the free extremity of the column.

$$\phi(x) = 1 - \cos\left(\frac{\pi x}{2L}\right), \quad (1)$$

$$\phi(x) = 1 - \cos\left(\frac{\pi x}{2L}\right)\left(a\left(\frac{x}{L}\right)^2 + b\frac{x}{L} + c\right). \quad (2)$$

In Eq. (2), the coefficients a , b , and c were adjusted using optimization techniques. Eq. (3) calculates the vibration frequency of the structure, in hertz, as a function of time, considering the generalized stiffness, $K(m_0, t)$, and the generalized mass concentrated at the free tip, $M(m_0)$.

$$f(m_0, t) = \frac{1}{2\pi} \sqrt{\frac{K(m_0, t)}{M(m_0)}}, \quad (3)$$

where the total stiffness of the structure is composed by three terms, as presented in Eq. (4):

$$K(m_0, t) = K_0(t) - K_g(m_0) + K_{s_0}, \quad (4)$$

where the final stiffness varies over time and with the lumped mass localized at the tip, being calculated as the sum of the stiffness of each segment defined in the geometry of the analyzed element. $K_0(t)$ is the conventional generalized stiffness, $K_g(m_0)$ is the portion referring to the geometric stiffness, which depends on the effort existing axial, and K_{S_0} is the elastic stiffness, for consideration of the soil-structure interaction.

Applying the PTW and its derivatives, similarly as in Wahrhaftig et al. (2019), the stiffness and the mass of the system can be obtained. The portion of conventional generalized stiffness is defined as:

$$K_0(t) = \sum_{s=1}^n \int_{L_{s-1}}^{L_s} E_s(t) I_s(x) \left(\frac{d^2 \phi(x)}{dx^2} \right)^2 dx, \quad (5)$$

and the geometric one as:

$$K_g(m_0) = \sum_{s=1}^n \int_{L_{s-1}}^{L_s} \left[N_0(m_0) + \sum_{s+1}^n N_s + \bar{m}_s(x)(L_s - x)g \right] \left(\frac{d\phi(x)}{dx} \right)^2 dx, \quad (6)$$

where $N_0(m_0)$ is the force concentrated at the tip of the system, $N_0(m_0) = m_0g$; and N_s is the normal force in the segments above the considered segment, given by:

$$N_s = \int_{L_{s-1}}^{L_s} \bar{m}_s(x)(L_s - x)g dx, \quad (7)$$

with $\bar{m}_s(x)$ being the mass per unit length. The stiffness portion of soil K_{S_0} is computed by:

$$K_{S_0} = \sum_{s=1}^n \int_{L_{s-1}}^{L_s} S_s D_s(x) \phi(x)^2 dx, \quad (8)$$

where the S_s is the elastic soil parameter, considered constant, in this case, in each layer of soil; and $D_s(x)$ is the diameter along the depth of the foundation, which depends on its geometry, it may be constant or not. To determine the total generalized mass of the system is necessary to do:

$$M(m_0) = m_0 + \sum_{s=1}^n \int_{L_{s-1}}^{L_s} A_s(x) \rho_s (\phi(x))^2 dx, \quad (9)$$

where $A_s(x)$ represents the cross-section area and ρ_s the density of the material, in the respective segment s . Taking the above considerations and using the concentrated mass as the independent variable of the problem, the critical buckling force, N_f , can be found by the concept present in Eq. (10), such as:

$$f(m_0, t) = 0 \Rightarrow N_0(m_0) \Big|_{f(m_0, t)=0} = N_f \quad (10)$$

MODEL OF THE PRACTICAL INVESTIGATED STRUCTURE

The structure investigated in this paper, is a slender, real, reinforced concrete pole with variable geometry, shown in Fig. 2, which is 46 m high, including the 40 m superstructure, with a circular hollow section, and the foundation, which is relatively deep, 6 m long, is a circular full section-type foundation. Its slenderness index is greater than 400. The geometric details of the column and the finite element model are shown in Fig. 2, where g is the acceleration due to gravity; S , D , and th are the type of section, the outside diameter, and the wall thickness, respectively; d_b represents the diameter of the steel bars; n_b is the number of bars; and c' is the concrete cover in the respective cross sections.

The lateral action of the soil was represented by an elastic parameter ($k_{S_0}(x)$) equal to 2669 kN/m³. The rheological property of the concrete was taking account by Eurocode 2 (2004). The modulus of elasticity adopted for the superstructure and foundation were 37566 MPa and 25044 MPa, and their density was 2600 kg/m³ and 2500 kg/m³, respectively. Modal analysis was performed using the finite element method (FEM), through SAP2000 (2018) a commercial software package. Modal shapes for the structures were obtained considering the material and geometric nonlinearly. The structures were modeled using bar elements with constant and variable cross-sections, as appropriate. The discretization of the structure in FEM was 51 frame elements.

The structure under consideration was modeled using beam elements with constant or variable cross-sections, as appropriate. The varying mass was applied to the model together with the corresponding axial forces, in addition to the existing masses and forces present in the system. Suitably chosen spring constants were assigned to the foundation beam elements. For solving the problem using both Rayleigh method and FEM, the time interval was divided into 400 different instants of interest to calculate the modulus of elasticity of the material. The buckling load was determined by assuming an isotropic homogeneous material with Poisson's ratio 0.2 which is representative of concrete.

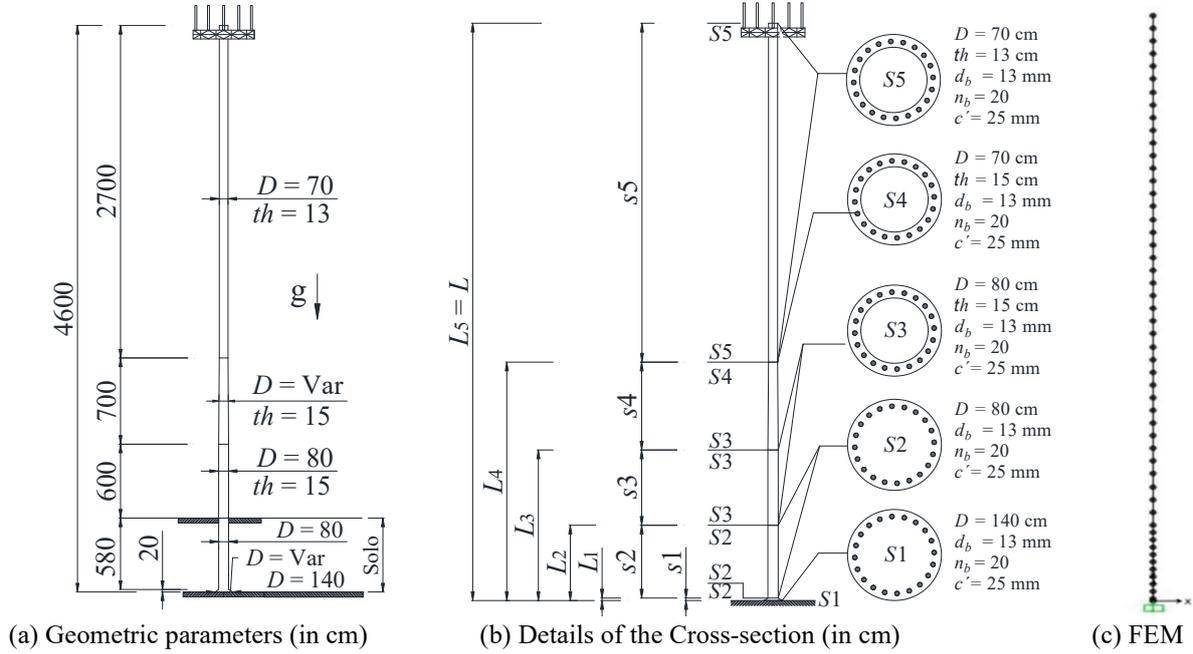


Figure 2. Details of the structure and finite element model

OPTIMIZATION TECHNIQUE

The main objective of an optimization is to maximize or minimize a function subjected to restrictions, the problem can be presented as follows:

$$\text{minimize } f(x)$$

$$\text{subjected to } h,$$

where f is the objective function and x is the variable vector of the objective function and h is the vector corresponding to the constraints.

In this analysis, optimization techniques were used to approximate the coefficients of Eq. (2) with the results generated by the numerical model developed using FEM. The optimization problem took as reference an objective configuration, in this case, consider if a curve obtained in finite element modeling. The coefficients a , b , and c of Eq. (2) were determined by solving an optimization problem following the procedure described below:

Determine the vector \mathbf{b} :

$$\mathbf{b}^T = [a \quad b \quad c], \quad (11)$$

that minimize the objective function,

$$f(\mathbf{b}) = \frac{1}{2} r \sum_{i=1}^q [\phi(\mathbf{b}, x_i) - \phi_{FEM}(x_i)]^2, \quad (12)$$

subjected to,

$$\phi(\mathbf{b}, L) = 1. \tag{13}$$

The objective function shown in Eq. (12) is the error or the departure of the values of the adopted shape function $\phi(\mathbf{b},x)$, given by Eq. (2) from the FEM shape function $\phi_{FEM}(x)$. The penalty parameter r is used to adjust the order of magnitude of the errors, since the errors are usually small numbers, they needed to be factored. The initial value is the independent term which is equal to 1 and all the other values are equal to 0. It is important to highlight that, in this sense, the function obtained from the optimization process obey the boundary condition of the problem. Further details of the optimization procedure, including others shape functions, can be found in Wahrhaftig et al. (2022)

RESULTS AND DISCUSSIONS

To develop the method, two trial functions were used, a trigonometric and a polynomial function. The trigonometric equation is considered to be the more accurate solution of the problem even for tapered structures (Wahrhaftig, 2017). The polynomial function coefficients were determined through optimization techniques and the results are presented in Tab. 1, where r is the penalty parameter; a , b , and c are the applied coefficients to optimize the equations.

Table 1. Errors and coefficients obtained for the optimization problem.

Polynomial function (Eq. (2))
$r = 100,000$
$a = -0.26161$
$b = 0.435296$
$c = 0.826314$
<i>Error = 3.70%</i>

Figure 3 presents the results obtained for the critical buckling load by the analytical procedure, using the trigonometric and polynomial equation.

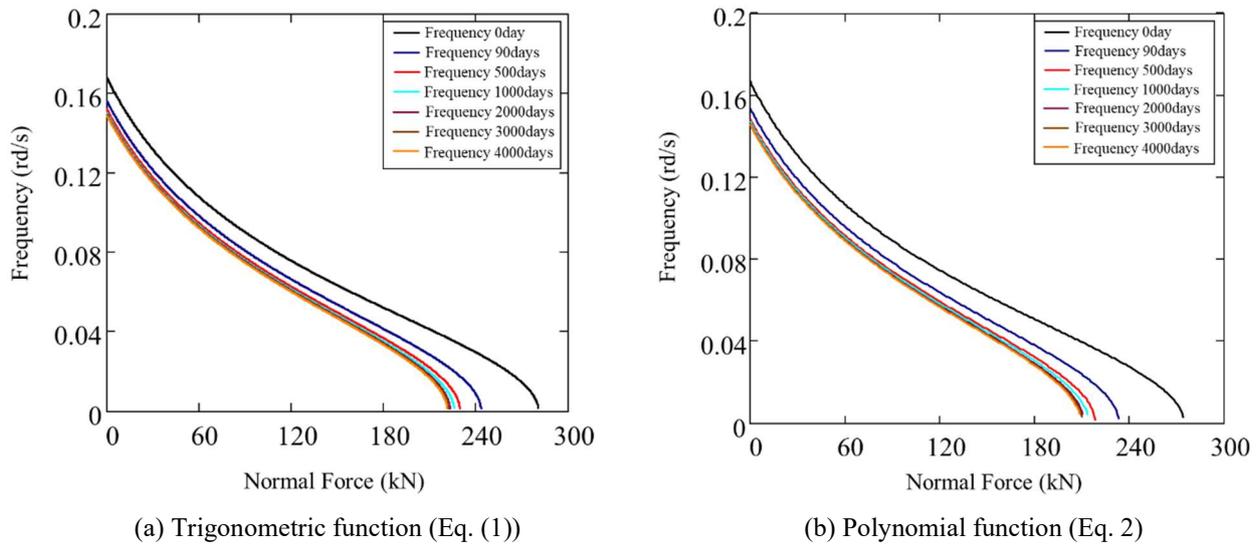


Figure 3. Results for the frequency by Rayleigh method.

Figure 4 shows the comparison between analytical results and MEF for elapsed times equal to 0 (a) and 4000 (b) days. In Tab. 2, values of critical buckling load are presented for both analytical and computational procedures.

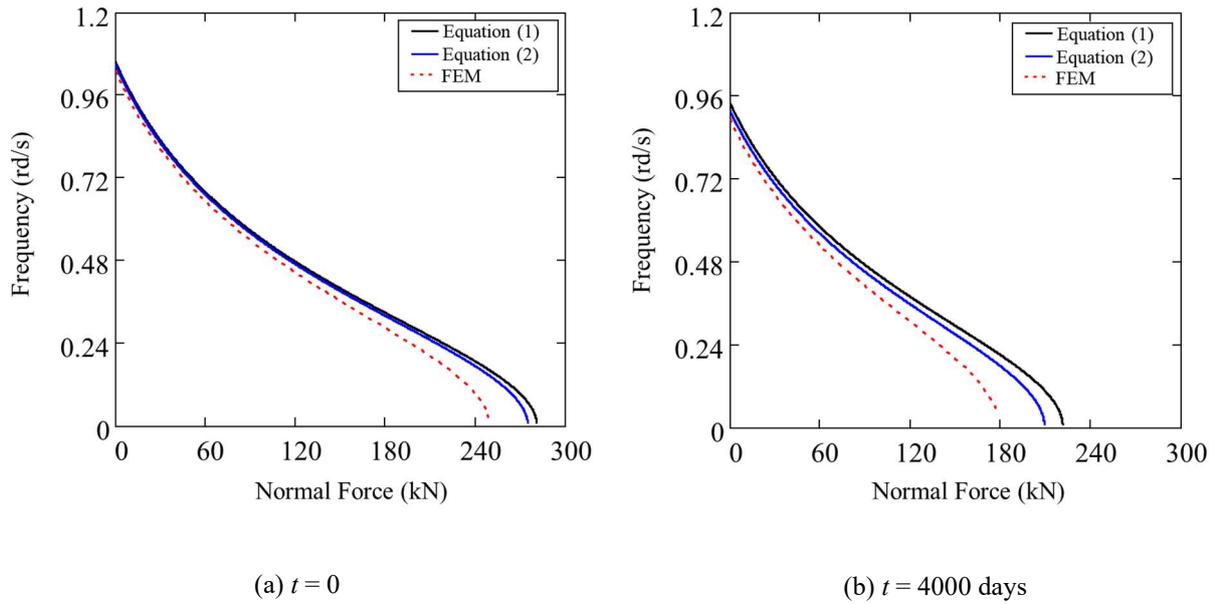


Figure 4. Comparison of the FEM and analytical results.

Table 2. Critical buckling load

Equation	Classification	Error (%)	Buckling load (kN)			
			$t = 0$	Dif. FEM	$t = 4000$ days	Dif. FEM
FEM	Reference	-	249.6	-	179.5	-
Eq. (1)	Trigonometric	42.2	281.1	12.9%	221.8	23.6%
Eq. (2)	Quadratic optimized	3.7	274.9	10.4%	209.7	16.8%

Dif. = difference to FEM.

Figure 5 presents the graph with the variations of the critical buckling load, calculated by FEM and Eq. (1) and Eq. (2).

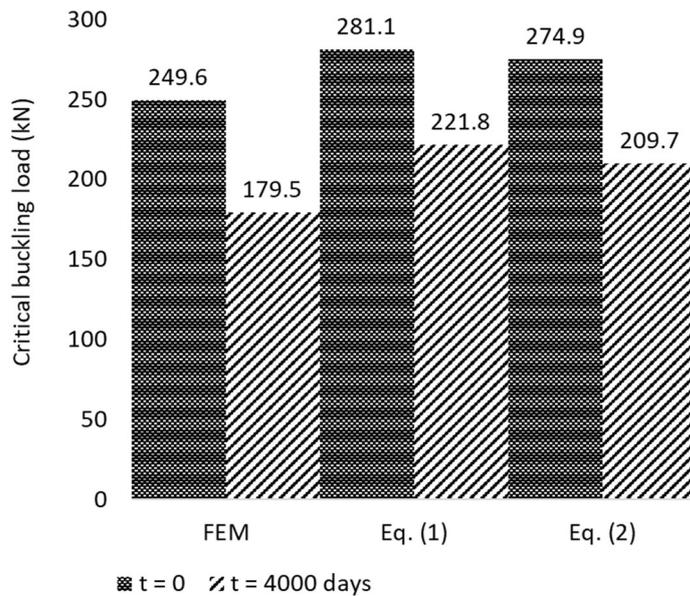


Figure 5. Critical buckling load

CONCLUSIONS

In this article, an analytical and numerical analysis was developed that determined the time-dependent critical load of a slender reinforced concrete column. The analytical method was based on the concepts of dynamics by applying the Rayleigh method and the numerical by finite element method (FEM). It is possible to conclude that for $t = 0$, the instant at which the structure is loaded, the lowest critical load for the first optimization problem (249.6 kN) was obtained using the FEM, while the largest critical load of 281.1 kN was provided by the trigonometric function given by Eq. (1). It was observed that, even by obeying the boundary conditions of the problem, the difference from critical load obtained via Eq. (3) and the FEM solution was 10.4%. It was noted, with the optimization techniques, that was possible to reduce the error between the result obtained by Eq. (1) in relation to the FEM, for the time 0 from 12.9% to 10.4% (2.5% reduction), and for 4000 days from 23.6 % to 16.8% (6.8% reduction). It is also concluded that the results obtained by the FEM are more conservative for determining the critical buckling load of the structure.

ACKNOWLEDGMENTS

The authors thank the National Council for Scientific and Technological Development (CNPq) of Brazil for the support given by means of grant of number 161952/2021-6.

REFERENCES

- Courant, R., 1943, "Variational methods for the solution of problems of equilibrium and vibrations". Bulletin of the American Mathematical Society 49: 1–23.
- Euler, L., 1774, "Methodus inveniendi lineas curvas maximi minimive sive motus scientia analytice exposita", Lausanne.
- European Standard., 2004, "EN 1992-1-1 - Eurocode 2: Design of concrete structures — Part 1: General rules and rules for buildings". Brussels.
- Rayleigh., 1877, "Theory of Sound. Dover Publications", New York, re-issued.
- SAP2000., 2018, "Analysis reference manual. Integrated software for structural analysis and design". Computers and Structures, Inc. Berkeley, California.
- Timoshenko, S.P., Gere, J.M., 1961, "Theory of elastic stability". 2nd ed. New York: McGraw-Hill Book Company.
- Uzny, S., 2011, "An elastically supported geometrically nonlinear slender system subjected to a specific load in respect of bifurcation load and free vibrations". International Journal of Bifurcation and Chaos in Applied Sciences and Engineering, 21(10):2983–2992.
- Wahrhaftig, A.M., Magalhães, K.M.M., Brasil, R.M.L.R.F., Murawski, K., 2020, "Evaluation of Mathematical Solutions for the Determination of Buckling of Columns Under Self-weight". Journal of Vibration Engineering & Technologies, 1-17.
- Wahrhaftig, A.M., Magalhães, K.M.M., Silva, M. A., da Fonseca Brasil, R. M., Banerjee, J. R. 2022. "Buckling and free vibration analysis of non-prismatic columns using optimized shape functions and Rayleigh method". European Journal of Mechanics-A/Solids, 94, 104543.
- Wahrhaftig, A.M., Marcelo, A. S., Brasil, R.M.L.R.F., 2019, "Analytical determination of the vibration frequencies and buckling loads of slender reinforced concrete towers". Latin American Journal of Solids and Structures, v16, 05, e196.
- Wahrhaftig, M., 2017, "Analysis of the first modal shape using two case studies". International Journal of Computational Methods, 16(06), 1840019.

RESPONSIBILITY NOTICE

The authors are the only parties responsible for the printed material included in this paper.